INSTALLATION INSTRUCTIONS

Product	Date	Form #
Flat Floor Base **DS-52**	8/29/97	INST-11

1. Place the base on the floor so the post is in the desired location. It may be necessary to mount the heads or rack on it first in order to determine the best location. Mark the mounting hole locations, and note whether it will be necessary to shim any corner with washers to compensate for floor irregularities.

2. Drill 17/32” holes in the floor at each mounting hole location, using care not to damage any equipment that may be under the floor. Most bases have holes for 3/8” bolts, but holes for 1/2” bolts are furnished in the taller bases.

3. Place the bolts in the holes, add nuts and washers, and tighten. If the floor is less than 1/4” thick, we recommend using **fender washers** on the bottom side. Do **not** use lag screws or sheet metal screws as these can pull out of the floor.

4. The height is adjustable by loosening the bolt at the top of the post one turn. If necessary, tap lightly on the top of the bolt to release the top plate. Adjust the height and direction of the top plate and retighten the bolt.

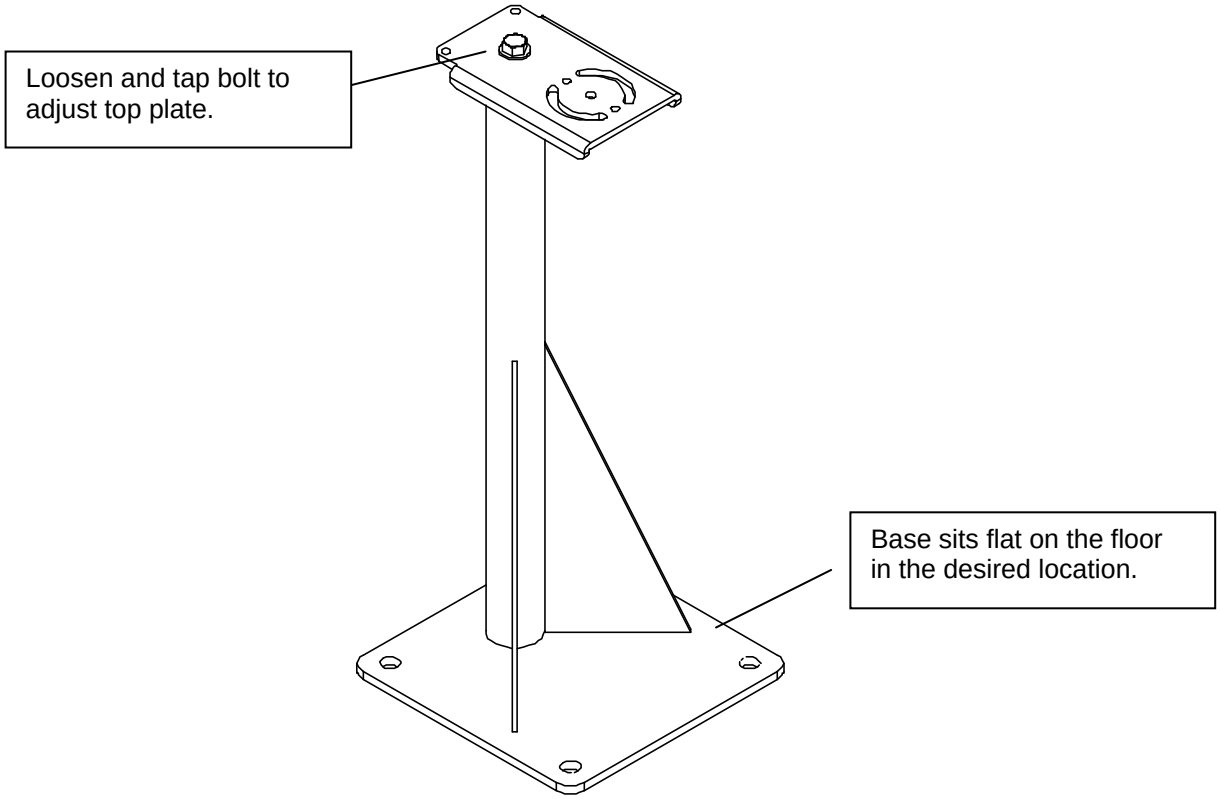

If you need assistance or have questions, call Gamber Johnson at 1-800-456-6868.